

## VERTICAL K-LED

Torre faro con sistema di sollevamento manuale. Quattro fari LED da 300 W.

Lighting tower with manual lifting system. 4 x 300 W LED.

Tour d'éclairage avec système de levage manuel. Lampes LED 4 x 300 W.



Immagine a scopo illustrativo  
images are for illustrative purpose only  
images à but illustratif

<b>TORRE FARO / LIGHTING TOWER / TOUR D'ECLAIRAGE</b>			
Modello	Model	Modèle	VERTICAL K-LED
Tensione	Voltage	Voltage	230V
Frequenza	Frequency	Fréquence	50Hz
Potenza	Rated power	Puissance	3,5 kW
Regime	Speed	Vitesse	1500 rpm
Altezza massima	Max height	Hauteur maximum	7,5 m
Sollevamento	Lifting	Levage	Verricello manuale / Manual winch / Treuil manuel
Sfilii	Stages	Extensions	5
Rotazione	Turning angle	Rotation	350°
Centralina	Controller	Coffret	Lovato Electric
Capacità serbatoio	Fuel tank capacity	Capacité du réservoir	105 L
Fari	Floodlights	Projecteurs	4 x 300 W
Tipo	Type	Type	LED
Pneumatici	Tyres	Pneus	155 R13
Stabilizzatori manuali	Manual stabilizer	Stabilizateursmanuel	4
Assale ammortizzato	Axle with suspension	Essieu à suspension	Si/Yes/Oui
Prese extra	Extra sockets	Extra prise	1 x 230 V


<b>MOTORE / ENGINE / MOTEUR</b>			
Modello motore	Engine model	Moteur modèle	Kohler KDW702
Tipo di combustibile	Fuel type	Type de carburant	Diesel
Cilindrata	Displacement	Cylindrée totale	686 cm <sup>3</sup>
Alesaggio/Corsa	Bore/Stroke	Alésage/Course	75/77,6 mm
Tipo di raffreddamento	Cooling type	Type de refroidissement	Acqua / Water / Eau
N. cilindri	Cylinders	N. cylindres	2
Regolazione	Regulation	Régulation	Meccanica/Mechanic/Mécanique
Iniezione	Injection	Injection	Indiretta/Indirect/Indirecte
Tensione	Voltage	Tension	12 V
Regime	Speed	Vitesse	1500 rpm
Consumo	Consumption	Consommation	0,6 l/h
Emissioni	Emissions	Emissions	ECE R 24 – EPA TIER 4

<b>ALTERNATORE / ALTERNATOR / ALTERNATEUR</b>			
Costruttore e modello	Make and model	Fabricant et modèle	Linz Electric
Potenza	Rating	Puissance	3,5 KW
Classe di isolamento	Insulationclass	Classe d'isolement	H
Cos-φ	Cos-φ	Cos-φ	1
Regolazione	Regulation	Régulation	Brushless with aluminum capacitor
Precisione della tensione	Voltage accuracy	Précision de la tension	±5%
Sovraccarico	Overload	Surcharge	10% 1h ogni/every/chaque 6h

**DIMENSIONI E PESO / DIMENSIONS AND WEIGHT / DIMENSION ET POIDS**

Dimensioni torre chiusa	Retracted dimension	Dimensions	1700*1150*2500 mm
Dimensioni torre aperta	Max dimension working mode	Dimensions ouvert	2600*2400*7500 mm
Peso	Weight	Poids	700 kg

**AREA ILLUMINATA / LIGHTING AREA / ZONE ECLAIREE**

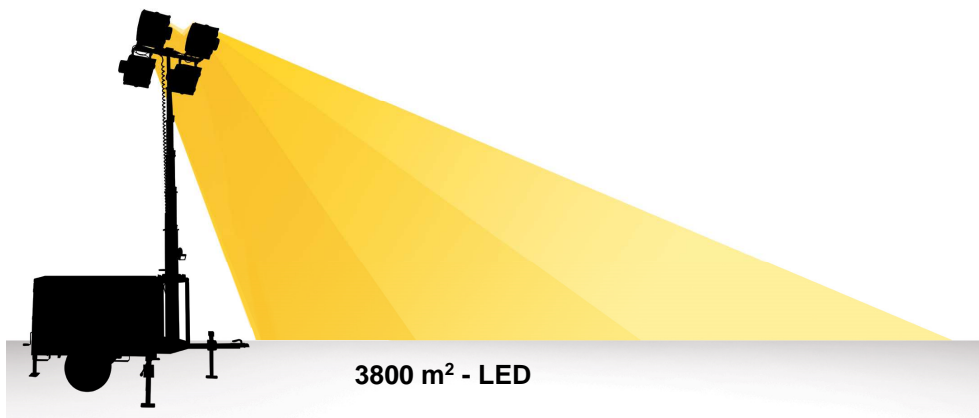

Le specifiche tecniche sono soggette a variazioni senza preavviso  
 In line with our policy of continuous development  
 Nous nous reservons le droit de charger les specifications techniques sans proavi